

# TOOL-A-THON®

Volume 19.1

Fowler |











www.fowlerprecision.com

3

## Fowler - Trimos V3, V4 & V5 **Electronic Height Gages**

The Fowler-Trimos V3, V4 and V5 vertical measuring instruments have been developed for the most difficult workshop environments. Manufactured in their entirety in Switzerland, they guarantee a robust, precise and reliable product in the long run.

- "Black mask" display with user friendly functions
- Electronically adjustable measuring force 0.75/1.5 (N)
- Lithium-ion rechargeable batteries
- · All adjustments possible without tools
- · Cast iron base for optimal stability
- · RS232 and USB interfaces requires 54-192-112-0 cable
- Dual probe holders (V4 and V5 Only)
- Carriage displacement: Manual
- (V5 includes selectable manual or motorized carriage displacement)
- · Measures heights, diameters, perpendicularity, centerlines, Min/Max/Delta
- Resolution: 0.00005"/0.001mm
- Repeatability (2s): 0.00008"/0.002mm (Ø 0.00016"/0.004mm)

#### All V Models Include:

- · Charging unit
- · Measuring insert with ruby ball Ø4mm
- Probe holder elbow Ø 8mm
- · Setting gage

Measuring Range

Air Cushion

Range with Probe inverted

Max. Permissible Errors

VЗ

· User's manual and test certificate

54-192-370-0	
28"/711mm 31.9"/812mm 0.00032"/0.008mm 0.0006"/0.015mm	
E4 404 470 0	

54-192-340-0

Air Cushion	0.0004"/0.010mm NC	0.0006"/0.015mm
V4	E4 404 440 0	F4 404 470 0
• •	54-191-440-0	54-191-470-0
Measuring Range	16"/407mm	28"/711mm
Range with Probe inverted	28.3"/719mm	40.2"/1023mm
Max. Permissible Errors	0.0002"/0.005mm	0.00028"/0.007mm
Frontal Squareness Deviation	0.0004"/0.010mm	0.0006"/0.015mm

54-192-340-0

0.00028"/0.007mm

16"/407mm

20"/508mm

V5	54-199-540-0	54-199-570-0	54-199-590-0
Measuring Range	16"/407mm	28"/711mm	43.7"/1110mm
Range with Probe inverted	28.3"/719mm	40.2"/1023mm	56"/1422mm
Max. Permissible Errors (μm)		2.5 + L(mm)/300	
Frontal Squareness Deviation	0.0002"/0.005mm	0.00032"/.008mm	0.00043"/0.011mm
Air Cushion		YES	
	Measuring Range Range with Probe inverted Max. Permissible Errors (μm) Frontal Squareness Deviation	Measuring Range 16"/407mm Range with Probe inverted Max. Permissible Errors (µm) Frontal Squareness Deviation 0.0002"/0.005mm	Measuring Range         16"/407mm         28"/711mm           Range with Probe inverted         28.3"/719mm         40.2"/1023mm           Max. Permissible Errors (µm)         2.5 + L(mm)/300           Frontal Squareness Deviation         0.0002"/0.005mm         0.00032"/.008mm

YES

Order No.	Description
54-192-340-0	V3 Height Gage
54-192-370-0	V3 Height Gage
54-191-440-0	V4 Height Gage
54-191-470-0	V4 Height Gage
54-199-540-0	V5 Height Gage
54-199-570-0	V5 Height Gage
54-199-590-0	V5 Height Gage
Probe Sets	
54-199-105-0	4mm Probe Set, 21 piece
54-199-106-0	8mm Probe Set, 16 piece
54-199-107-0	Economy Probe Set, 7 piece
Accessories	
54-199-400-0	12"/300mm Holder - for 8mm probes
54-777-120-0	Vmux software - for connecting multiple units to one PC









Range



54-199-570-0

Sale Price

**List Price** 

264380

	16"/407mm	\$4543.03	\$4145.00
	28"/711mm	5008.90	4505.00
	16"/407mm	5984.16	5385.00
	28"/711mm	6961.52	6265.00
	16"/407mm	6595.41	5935.00
	28"/711mm	7815.80	7030.00
	43"/1100mm	12,090.35	10,880.00
		\$1747.81	\$1540.00
NOW	Contact the Fowler	1304.22	1200.00
available with	Sales Department 1-800-788-2353	462.98	424.00
ISO Cert.			
		\$978.33	\$850.00
		460.80	390.00














# 3

## Fowler - Sylvac Hi Cal **Electronic Height Gages**



- · Measure internal and external diameters, centerlines, heights, widths, depths and MIN/MAX/TIR capability
- · Excellent repeatability thanks to the motorized carriage
- High reliability
- Data output USB and RS232
- · Battery life: 40 hours rechargeable during operation
- · Touch sensitive probe speed for easy operation
- · Base with small footprint
- · Includes: protective cover, charging set, ruby ball probe Ø3mm, setting gage and calibration certificate

6 Fd 54-931-150-0

available with ISO Cert.

#### **Accessory Probe Sets**



54-930-215-0









54-930-217-0

# **1mm Ball Probe with**

Order No. Range 54-931-150-0 6"/150mm 54-931-150-C 6"/150mm with ISO/A2LA Certification 54-931-300-0 12"/300mm 54-931-300-C 12"/300mm with ISO/A2LA Certification 54-931-450-0 17.5"/450mm 54-931-450-C 17.5"/450mm with ISO/A2LA Certification Accessories 54-930-215-0 Full Probe Accessory Set 54-930-217-0 Basic Probe Accessory Set





FREE Basic Probe Set with 54-931-450-0 Hi\_Cal Purchase \$617.62 Value!



## 6"/150mm & 12"/300mm Hi\_Cal Purchase

Accuracy	List Price	Sale Price
0.00013"/0.0034mm	\$4849.82	\$4300.00
		4550.00
0.00016"/0.0042mm	5573.46	5015.00
		5365.00
0.00020"/0.005mm	6093.03	5475.00
		5825.00
	\$1138.15	\$1025.00
	617.62	555.00













### **Electronic Height Gages**

- NEW True ABS measuring system
- Supplied with a NIST certified test block (1" x 2" x 3")
- · Supplied with mini USB data cable
- · Heavy duty single column design
- · Carbide scriber
- · Ground and lapped base for smooth movement
- · Steel rack with large hand wheel for coarse and fine adjustment
- · Positive locking level for scriber
- · Can be used with wireless transmitter (54-115-100-0)



Order No.	Range	Accuracy	List Price	Sale Price
54-175-012-1	NEW 12"/300mm	± 0.0016"/0.04mm	\$601.78	\$530.00
54-175-018-1	NEW 18"/500mm	± 0.002"/0.05mm	708.90	625.00
54-175-024-1	NEW 24"/600mm	± 0.002"/0.05mm	813.96	710.00
Accessory				
54-115-100-0	Wireless transmitte	r	\$108.59	\$99.00



# **7-HEIGHT**

## **Electronic Height Gages**

# W Design!

- · NEW base design with painted enamel finish has a more comfortable grip and is finely ground and lapped for smooth movement on surface plates
- · NEW fine adjust feature allows precise adjustment to required settings
- NEW preset feature allows setting pre-determined or reference measurements
- NEW 2 indicator holding bars included (3/8" and 8mm)
- · Direct inch/metric conversion
- Resolution 0.0005"/0.01mm
- Floating zero
- · Large, high contrast LCD display
- · Coarse adjustment hand wheel
- · Carriage locking lever
- Carbide tipped scriber



Order No.	Range	Accuracy	List Price	Sale Price
54-175-012-0	NEW 12"/300mm	± 0.0016"/0.04mm	\$524.56	\$400.00
54-175-018-0	<b>NEW</b> 18"/500mm	± 0.002"/0.05mm	611.57	465.00
54-175-024-0	NEW 24"/600mm	± 0.002"/0.05mm	688.39	525.00

54-175-024-0

## **Twin Beam Electronic Height Gages** with Offset Scriber

- · Carriage design with offset scriber holder
- · Base is ground and lapped for flatness
- · Handwheel provides course and fine movement
- · Updated electronic and mechanical design offers better accuracy and movement of carriage
- Carbide tipped scriber
- · Functions include preset, in/mm conversion and ABS/INC for direct or comparative measuring

Optional contact sensor can be used to indicate when measuring contact is made between the gage and another conductive surface





54-	174-2	12-3

54-174-212-3	12"/300mm	± 0.0016"/0.04mm	\$494.19	\$425.00
54-174-224-3	24"/600mm	± 0.002"/0.05mm	691.87	595.00
Accessory				
54-174-226-0	Contact sense	or	\$21.85	\$18.00

**Twin Beam Dial Height Gages** 

- · Separate digit counters register both upward & downward travel
- · Zero setting can be obtained throughout the gage's range
- · Coarse readings in 0.100" graduations: fine readings taken on indicator are 0.001"
- · Dual chrome plated beams
- · Carbide-tipped scriber.

Order No.

· Base is hardened, ground & lapped for maximum flatness



Order No.	Range	Accuracy	List Price	Sale Price
52-174-212-0	12"	± 0.0015"	\$296.51	\$225.00
52-174-224-0	24"	± 0.002"	494.19	415.00
32-114-224-0	24	1 0.002	707.10	410.







TOOL-A-THON® Vol. 19.

#### **Machinist Grade Dial Calipers**

52-008-706-0

"Very precise with consistent readings. I would never change this analog for a digital one "Erick T.



· 4-way measuring

- · Solid stainless steel construction
- 0.100"/2mm range per revolution
- · 0.001"/0.02mm reading dial face
- Tough shockproof gearing





52-008-007-0

			Dial Face		List	Sale
	Order No.	Range	Color	Accuracy	Price	Price
ı	52-008-706-0	0 - 6"	White	± 0.001"	\$81.60	\$60.00
	52-008-708-0	0 - 8"	White	± 0.0015"	99.57	79.00
	52-008-712-0	0 - 12"	White	± 0.002"	131.81	98.00
	52-008-709-0	0 - 150mm (Metric Model)	Yellow	± 0.02mm	81.60	61.00
		0 12				

## 0 - 6" Dial Calipers



- 4-way measuring
- Covered rack

Order No.

- · Accuracy ± 0.001"
- 0.100" per revolution
- · Dial graduation: 0.001"
- · Hardened stainless steel rack

Range

	Ш	32 00	0 007 0	
Dial Face Color	Accuracy	List Price	Sale Price	
Black	± 0.001"	\$93.33	\$60.00	Ī

# 52-008-005-0 0 - 6"/150mm Black ± 0.001" \$93.33 \$60.00 52-008-007-0 0 - 6"/150mm White ± 0.001" 86.70 60.00

## $oldsymbol{ t Dial}$ $oldsymbol{ t Calipers}$ $oldsymbol{ t Dial}$ $oldsymbol{ t Calipers}$





- 0.100" per revolution
- · Thumbroll for fine adjustment
- Carriage lock screw
- · Heavy duty stainless steel frame 4mm thick
- · Adjustable bezel with lock

7	Order No.	Description	Accuracy	Graduation	List Price	Sale Price
	52-008-050-0	0 - 6" - Whiteface	± 0.001"	0.001"	\$125.70	\$99.00
	52-008-051-0	0 - 6" - Blackface	± 0.001"	0.001"	125.70	99.00
	52-008-052-0	0 - 150mm - Whiteface	± 0.03mm	0.02mm	125.70	99.00

**IMPORTANT:** Due to recent tariff increases, prices maybe subject to change. Prices & Specifications are subject to change without notice.





- Jaw length: 2.5"
- · Large 0.100" one-rev dial
- · Depth rod

- · 4-way measurement
- · Cross-jaws for direct internal measurement
- · Stainless steel, satin chrome finish

Order No. 52-025-108-0

Sale \$112.00

List \$151.46

## **Premium Dial Caliper**



- · Four-way configuration for outside, inside, depth and step measurements
- Solid stainless steel construction
- · Silky smooth movement throughout
- · 0 6" range, 0.100" per revolution, 0.001" graduations
- Thumbroll for rapid setting
- · Knurled lock assures precise settings

Order No. 52-008-006-2

Sale \$110.

List \$147.12

### **Vernier Calipers**



52-059-016-0

- · Made of fully hardened stainless steel; microfine black graduations on a satin chrome finish for easy, precise reading
- · All models offer a depth rod which can be read directly from verniers
- · Measuring faces are ground and lapped for extreme accuracy
- · 4-way jaws for outside, inside, depth and step measurements
- · All sliding surfaces are raised to prevent defacement and wear of graduations

	_				
Order No.	Range	Graduation	Depth of Jaws	List Price	Sale Price
Vernier Caliper wit	h Fine Adjustment				
52-058-016-0	0 - 6"/0 - 150mm	0.001"/0.02mm	1.6"	\$51.69	\$35.00
52-058-008-0	0 - 8"/0 - 200mm	0.001"/0.02mm	1.9"	75.64	50.00
52-058-012-0	0 - 12"/0 - 300mm	0.001"/0.02mm	2.5"	117.28	80.00
Vernier Caliper wit	h Thumb Lock				
52-059-016-0	0 - 6"/0 - 150mm	0.001"/0.02mm	1.6"	46.68	30.00











## **XTRA-VALUE** Plus Electronic Calipers





Inch/Metric/Fraction reading: 0.0005"/0.01mm/ 1/128"

· Dust, water and oil resistant to IP54 standards making it great for shop environments

· Heavy Duty frame for extra rigidity and wear

· Super large, easy to read 14 x 52mm display

· Combined thumbrest and thumbroll for fine adjustment

_	Order No.	Range	Resolution	Accuracy	List Price	Sale Price
	54-103-006-0	0 - 6"/150mm	0.0005"/0.01mm	± 0.001"/0.02mm	\$79.11	\$64.00
	54-103-012-0	NEW 0 - 12"/300mm	0.0005"/0.01mm	± 0.0015"/0.04mm	135.00	120.00

# XTRA-VALUE CAL Electronic Calipers

Buy a 12" (54-101-300-1) at list price and get a 6" (54-101-150-2) FREE



· Large easy-to-read display

· Resolution: 0.0005"/0.01mm

· Absolute/Incremental Measurement

· 4-way measuring

Order No.	Range	Display Type	List Price	Sale Price
54-101-300-P	NEW Buy a 12	" (54-101-300-1) and Get a 6" (54-101-150-2) FREE	\$152.05	\$101.33
54-101-150-2	6"/150mm	Regular Display - includes FREE NIST Cert.	50.72	40.00
54-101-600-1	6"/150mm	Super Large Display with hold feature	66.16	51.00
54-101-200-1	8"/200mm	Regular Display	79.36	65.00
54-101-800-1	8"/200mm	Super Large Display with hold feature	99.18	76.00
54-101-300-1	12"/300mm	Regular Display - includes FREE NIST Cert.	101.33	83.00
54-101-900-1	12"/300mm	Super Large Display with hold feature	132.44	111.00



## Available in February

- NEW HID Interface no dongle needed
- · Extra battery tray and 1" standard included
- Supplied with NIST certification
- · Heavy duty frame with 4 way measuring
- · Super large display
- · Bluetooth in a value priced electronic caliper
- · Protected to IP67





Order No.	Range	Accuracy	List Price	Sale Price
54-100-554-BT	NEW 0 - 4"/100mm	0.001"/0.02mm	\$180.00	\$160.00
54-100-556-BT	NEW 0 - 6"/150mm	0.001"/0.02mm	185.00	165.00
54-100-558-BT	NEW 0 - 8"/200mm	0.0015"/0.04mm	225.00	200.00
54-100-512-BT	NEW 0 - 12"/300mm	0.0015"/0.04mm	240.00	215.00

### **Economy Digital Calipers**



Order No.	Range	Accuracy	List Price	Sale Price
54-100-004-2	0 - 4"/100mm	0.001"/0.02mm	\$111.12	\$84.00
54-100-000-2	0 - 6"/150mm	0.001"/0.02mm	129.57	87.00
54-100-008-2	0 - 8"/200mm	0.0015"/0.04mm	152.15	115.00
Accessory				
54-115-100-0	Wireless transmitte	r	\$110.76	\$95.00





















## Ultra-Cal VI **Electronic Calipers**





- IP67 rated
- · Available with or without Bluetooth
- · Heavy duty frame
- Extra large display
- · NOW available with ISO Cert.







Order No.	Description	Accuracy	Resolution	List Price	Sale Price
Without Data Ou	ıtput				
54-100-177-0	6"/150mm	0.0008"/20 <i>µ</i> m	0.0005"/0.01mm	\$119.65	\$105.00
54-100-178-0	8"/200mm	0.0012"/30µm	0.0005"/0.01mm	244.49	215.00
54-100-179-0	12"/300mm	0.0012"/30µm	0.0005"/0.01mm	327.73	295.00
Bluetooth					
54-100-167-0	6"/150mm	0.0008"/20µm	0.0005"/0.01mm	\$344.36	\$295.00
54-100-167-C	6"/150mm with Is	SO/A2LA Certification			324.00
54-100-168-0	8"/200mm	0.0012"/30µm	0.0005"/0.01mm	639.48	495.00
54-100-169-0	12"/300mm	0.0012"/30µm	0.0005"/0.01mm	852.07	650.00
Accessory					
54-115-246-BT	USB bluetooth re	ceiver		\$50.24	\$45.00

## **Ultra-Cal V Electronic Calipers**



- depth and step (6" & 8" models)
- · Hardened stainless steel construction
- · Direct RS232 output
- · Features Absolute/Relative Measuring Modes
- Thumbroll (6" and 8" models only)
- · NOW available with ISO Cert.







Order No.	Description	Accuracy	Resolution	List Price	Sale Price		
54-100-667-0	Buy 5 standard 6	5"/150mm		\$1033.05	\$825.00		
	Electronic Calipe	ers (54-100-067-1), Get	1 FREE				
54-100-067-1	6"/150mm	0.0008"/20 <i>µ</i> m	0.0005"/0.01mm	\$206.61	\$165.00		
54-100-067-C	6"/150mm with IS	O/A2LA Certification			194.00		
54-100-068-1	8"/200mm	0.0012"/30μm	0.0005"/0.01mm	491.87	370.00		
54-100-069-1	12"/300mm	0.0012"/30 <i>µ</i> m	0.0005"/0.01mm	590.24	490.00		
Connectivity Cal	Connectivity Cables						
54-115-526-0	Proximity cable wi	ith USB connection		\$141.57	\$125.00		
54-115-527-0	Proximity cable wi	ith serial connection		141.57	125.00		
54-115-526-0	Proximity cable wi						

## **Ultra-Cal VI Proximity Electronic Calipers**









- IP67 rated
- Ultra-Cal VI technology with proximity cable data output
- · Heavy duty frame
- Extra large display

Order No.	Description	Accuracy	Resolution	List Price	Sale Price		
54-100-444-1	6"/150mm	0.0008"/20µm	0.0005"/0.01mm	\$161.26	\$140.00		
54-100-448-1	8"/200mm	0.0012"/30μm	0.0005"/0.01mm	291.31	250.00		
54-100-412-1	12"/300mm	0.0012"/30μm	0.0005"/0.01mm	390.15	350.00		
Connectivity Ca	Connectivity Cables						
54-115-526-0	-115-526-0 Proximity cable with USB connection			\$141.57	\$125.00		
54-115-527-0	Proximity cable v	Proximity cable with serial connection			125.00		

## 0.00005" Electronic Caliper





- · Bluetooth connectivity · High resolution: 0.00005"/0.001mm
- Accuracy up to 4": 0.0006"/0.015mm Accuracy above 4": 0.0012"/0.03mm
- Repeatability: 0.00016"/0.004mm
- · Heavy duty frame (3.5mm)









Order No.	Description	List Price	Sale Price
54-100-100-0	6"/150mm Micron Electronic Caliper	\$400.07	\$325.00
Accessory			
54-115-246-BT	USB bluetooth receiver	\$50.24	\$45.00

















· Jaw depth: 4"

Accuracy: 0.003"/0.08mm

Resolution: 0.0005"/0.01mm

Hold feature

Absolute/Incremental measurement

Preset mode includes offset size for ID measurements

· All sizes feature fine adjustment screw

· Includes shop hardened case

Order No. 54-100-024-1

Sale \$275.

List \$333.33

## **Light Line Electronic Calipers**





- · Light weight beam made of oxide coated aluminum with double inner prismatic guide ways for optimal guidance and sliding characteristics
- · Stainless steel jaws, hardened and finely ground with knife edge top jaws
- · Jaws are adjustable and exchangeable
- · Spare jaws can be modified and exchanged with standard jaws for special applications
- · Both jaws are moveable to any position on the main beam
- · Electronics feature on/off, floating zero and direct in/mm conversion
- 0.0005"/.01mm resolution and repeatability
- Includes a fitted case, instructions and test certificate

Order No.	Range	Accuracy	List Price	Sale Price
54-112-012-0	0 - 12"/300mm	0.0015"/0.04mm	\$313.06	\$260.00
54-112-030-0	0 - 31"/800mm	0.002"/0.06mm	721.62	605.00
Accessory				
52-075-150-0	6" replacement jaws		\$106.12	\$90.00

### **Extended Range Dial Caliper**



Order No. 52-008-024-0

Jaw depth: 3.375"

· Stainless steel construction

· Satin chrome finish

· Depth rod

· 0.500" internal measuring nibs

List \$317.75

#### Fowler-Sylvac Ultralight IV Electronic Calipers

The Fowler-Sylvac Ultralight IV, new design, new features, built-in Bluetooth transmitter. Discover our amazing Ultralight long range calipers.



Alternative jaws available, contact the Fowler Technical Department for more information 1-800-788-2353

<u>Specifications</u>	54-110-512-0	54-110-524-0	54-110-540-0	54-110-560-0	54-110-580-0	54-110-600-0	
Measuring Range	0-15"/0-400mm	0-24"/0-600mm	0-40"/0-1000mm	0-60"/0-1500mm	0-80"/0-2000mm	0-100"/0-2500mm	
Maximum Error	30μm/0.0012"	40μm/0.0016"	50μm/0.002"	90μm/0.0035"	120µm/0.0048"	200μm/0.0078"	
Repeatability	20µm/0.0008" 30µm/0.0012"						
Measuring Force	5 - 10 N						
Connection			Bluetoo	oth Smart/Proxi RS	6-232 or - USB		
Protection Rating			IP67 (E	Electronic Module)			
Preset Max.	±9999.99 mm / ±399.9995 IN						
Weight	1.5 kg	1.6 kg	1.9 kg	2.3 kg	2.6 kg	2.9 kg	

Order No.	Range	List Price	Sale Price
54-110-512-0	0 - 15"/0 - 400mm	\$2102.65	\$1830.00
54-110-524-0	0 - 24"/0 - 600mm	2454.30	2175.00
54-110-540-0	0 - 40"/0- 1000mm	2824.69	2540.00
54-110-560-0	0 - 60"/0 - 1500mm	4246.91	3830.00
54-110-580-0	0 - 80"/0 - 2000mm - special order	5851.21	5200.00
54-110-600-0	0 - 100"/0 - 2500mm - special order	7070.56	6400.00
Connectivity Cables/A	ccessory		
54-115-526-0	Proximity USB Cable	\$141.57	\$125.00
54-115-527-0	Proximity Serial Cable	141.57	125.00
54-115-246-BT	USB Bluetooth Receiver	50.24	45.00



















FOOL-A-THON® Vol. 19.1






- · Microfine graduations on satin chrome finish and carbide tipped measuring faces
- Diameter of measuring faces: 0.256"
- · Graduation: 0.0001"
- Flatness: 0.00003"
- · Positive lever locking clamp
- · Spindle thread hardened, ground and lapped for ultimate accuracy
- · Anvil & spindle hardened and precision ground with microlap finish on tips
- · Includes a wrench and case



52-215-003-1

Order No.	Range	Accuracy	Thimble	List Price	Sale Price
52-240-101-1	0 - 1"	± 0.00015"	Ratchet	\$42.43	\$34.00
52-240-102-1	1 - 2"	± 0.00015"	Ratchet	49.33	39.00
Set					
52-215-003-1	0 - 3" with sta	andards		\$183.63	\$131.00

#### **Outside Inch Micrometer Set**

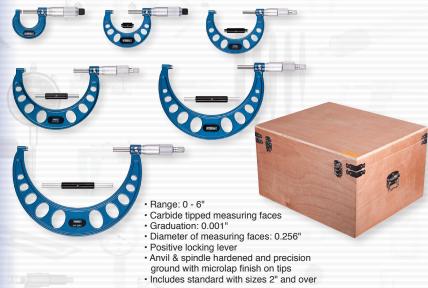

Order No. 52-253-600-1

List \$327.69

**IMPORTANT:** Due to recent tariff increases, prices maybe subject to change. Prices & Specifications are subject to change without notice.

## **Outside Inch Micrometers** with Decimal Equivalents on Frame



- · Black decimal equivalents on satin chrome finished forged steel frame
- · Ratchet thimble and locking nut
- · Includes standard for 1-2" sizes

Order No.	Range	Accuracy	Thimble	List Price	Sale Price
52-235-001-1	0 - 1"	± 0.0001"	Ratchet	\$67.56	\$49.00
52-235-002-2	1 - 2"	± 0.0001"	Ratchet	78.20	57.00
52-235-003-2	2 - 3"	± 0.0001"	Ratchet	97.76	71.00
Set					
52-235-100-0	0 - 3"			\$245.14	\$216.00

### **Swiss-Style Micrometers**



Order No.	Range	Accuracy	List Price	Sale Price
52-229-201-0	0 - 1"	± 0.00016"	\$54.95	\$40.00
52-229-202-0	1 - 2"	± 0.00016"	64.35	47.00
52-229-203-0	2 - 3"	± 0.0002"	79.34	58.00
52-229-204-0	3 - 4"	± 0.0002"	91.08	66.00
52-229-205-0	4 - 5"	± 0.00024"	112.48	82.00
52-229-206-0	5 - 6"	± 0.00024"	132.11	97.00
Sets				
52-229-213-0	0 - 3"		\$198.09	\$145.00
52-229-214-0	0 - 4"		280.45	206.00
52-229-220-0	0 - 100mm		280.45	206.00


















- Resolution: 0.0001" (using vernier) · Microfine graduations on satin chrome
- Carbide tipped measuring faces
- · Positive locking nut on spindle
- · Sizes over 1" include standard
- · Includes case



Order No.	Range	List Price	Sale Price
52-224-001-0	0 - 1"	\$116.01	\$80.00
52-224-001-0	1 - 2"		84.00
	The state of the s	121.87	
52-224-003-0	2 - 3"	138.81	96.00
52-224-004-0	3 - 4"	152.69	105.00
52-224-005-0	4 - 5"	161.61	111.00
52-224-006-0	5 - 6"	168.98	117.00
Sets			
52-224-103-0	0 - 3" set	\$366.22	\$254.00
52-224-104-0	0 - 4" set	519.31	359.00
52-224-220-0	0 - 75mm set	385.60	267.00

### **Large Capacity Inch Micrometers**

Fowler's Large Capacity Inch Micrometers are used for larger applications and is available in sizes up to a 20". Each micrometer offers superior design and workmanship to ensure high precision and long life — and at economical prices.



- · Hammertone blue baked finish
- · Microfine graduations on satin chrome finish and carbide tipped measuring faces.
- Diameter of measuring faces: 0.295"
- · Ratchet stop thimble for exact and repetitive readings
- Flatness: 0.00003"
- · Quick, easy zero adjustment on sleeve
- Positive lever locking clamp ensures reliable measurement setting at all times
- · Anvil & spindle hardened and precision ground with microlap finish on tips
- · Includes standard
- Includes a wrench and case

Fowler Barner	

JOL-A-THON® Vol. 19.1

Order No.	Range	Graduation	Accuracy	List Price	Sale Price
52-240-013-0	12 - 13" w/standards & case	0.001"	0.00044"/0.011mm	\$357.75	\$265.00
52-240-014-0	13 - 14" w/standards & case	0.001"	0.00044"/0.011mm	399.71	299.00
52-240-015-0	14 - 15" w/standards & case	0.001"	0.00044"/0.011mm	411.36	308.00
52-240-016-0	15 - 16" w/standards & case	0.001"	0.00044"/0.011mm	449.76	335.00
52-240-017-0	16 - 17" w/standards & case	0.001"	0.0005"/0.013mm	462.11	345.00
52-240-018-0	17 - 18" w/standards & case	0.001"	0.0005"/0.013mm	501.81	375.00
52-240-019-0	18 - 19" w/standards & case	0.001"	0.0005"/0.013mm	530.69	395.00
52-240-020-0	19 - 20" w/standards & case	0.001"	0.0005"/0.013mm	634.80	475.00

## **Deep Throat Electronic Micrometers**



5	4-	51	7	-0	02	2-(	J

1	Order No.	Anvil	Accuracy	Throat Depth	List Price	Sale Price
Ī	54-517-001-0	Flat	± 0.00012"/0.003mm	6"	\$220.00	\$200.00
	54-517-002-0	Ball	± 0.00016"/0.004mm	11.875"	245.00	220.00

## **Deep Throat Vernier Micrometers**

Fowler's "U"-frame Deep Throat Micrometers are available with depths of 6" and 12". Use Deep Throat Micrometers for taking accurate measurements of steel and plastic sheets and plates whenever a depth measurement of 2" to 12" is needed.

- · Hammertone blue baked enamel frame
- Graduations are microfine on satin chrome finish for easy reading
- All models feature a ratchet stop thimble for exact and repetitive readings
- The spindle thread is hardened, ground and lapped. The anvil and spindle are hardened and precision ground with microlap finish on carbide tipped measuring faces.
- Diameter of measuring faces = 0.256"
- Positive lever locking clamp ensures reliable measurement at all times
- Wrench furnished with each micrometer for fast, easy zero adjustment on the sleeve
- Flatness: 0.00003"
- Parallelism: 0.00005"
- · 52-517-612-1 supplied with a ball anvil
- · Includes case



Order No.	Range	Graduation	Accuracy	Anvil	Throat Depth	List Price	Sale Price
52-517-611-1	0 - 1"	0.0001"	0.00016"	Flat	6"	\$148.36	\$120.00
52-517-612-1	0 - 1"	0.0001"	0.0002"	Ball	11.875"	185.06	148.00

**5** 

OL-A-THON° Vol. 19.











- · Water resistant to IP54 specifications
- · True inch/metric conversion
- · Accuracy: 0.00016"
- · Resolution: 0.00005"/0.001mm
- · Friction thimble
- · Sizes over 1" include standard

Order No.	Range	List Price	Sale Price
54-860-241-0	0 - 1" Blade Anvil	\$269.86	\$200.00
54-860-242-0	1 - 2" Blade Anvil with standard	293.15	218.00
54-860-243-0	2 - 3" Blade Anvil with standard	306.19	228.00
54-860-244-0	3 - 4" Blade Anvil with standard	320.47	240.00

#### **Vernier Inch Blade Micrometers**



- · Use blade micrometers to measure the outside diameter of workpieces which have narrow grooves, "T" slots and other dimensions
- · Anvil & spindle hardened & precision ground with microlap finish on ends
- · Non-rotating spindle
- · Ratchet thimble
- Blade thickness = 0.030"; blade width = 0.256"; blade penetration = 0.315"
- · Sizes over 1" include a standard

Order No.	Range	Graduation	Accuracy	List Price	Sale Price
52-246-001-1	0 - 1"	0.0001"	0.00016"	\$218.65	\$160.00
52-246-002-1	1 - 2"	0.0001"	0.00016"	238.02	175.00
52-246-003-1	2 - 3"	0.0001"	0.0002"	248.37	185.00
52-246-004-1	3 - 4"	0.0001"	0.0002"	253.29	190.00

**IMPORTANT:** Due to recent tariff increases, prices maybe subject to change. Prices & Specifications are subject to change without notice.

#### **Ball-Anvil Micrometers**



· Microfine graduations on satin chrome

- · Anvil and spindle hardened and ground; spindle thread hardened, ground and lapped
- · Ratchet stop thimble for exact readings
- Accuracy: 0.00016"
- · Graduation: 0.0001"

1	Order No.	Range	List Price	Sale Price
	52-244-001-1	0 - 1" Ball Anvil	\$84.16	\$63.00
	52-244-101-1	0 - 1" Ball Anvil & Ball Spindle	99.13	74.00

## **Digit Counter Ball-Anvil Micrometers**



#### 52-244-201-1

- · Microfine graduations on satin chrome.
- · Digital counter reads to 0.001"; sleeve reads to 0.0001"
- · No. 52-244-201-1 spindle hardened and precision ground with a carbide tipped measuring face
- · No. 52-244-301-1 anvil is hardened and precision ground
- · Spindle thread hardened, ground & lapped
- · Ratchet stop thimble on all models
- Accuracy: 0.00016"
- · Graduation: 0.0001"

Order N	lo. Range	List Price	Sale Price
52-244-	<b>201-1</b> 0 - 1" Ball Anvil	\$121.87	\$90.00
52-244-	<b>202-1</b> 1 - 2" Ball Anvil	146.96	108.00
52-244-	<b>301-1</b> 0 - 1" Ball Anvil & Spindle	129.25	96.00

#### **Electronic IP54 Ball-Anvil Micrometers**



•	Carr	nae	me	asuri	ng	taces	
	T			. 1			

- Accuracy: 0.00016"/0.004mm
- Large easy-to-read LCD display

Order No.	Range	List Price	Sale Price
54-860-113-0	0 - 1"/0 - 25mm Ball Anvil & Flat Spindle	\$204.39	\$150.00
54-860-114-0	1 - 2"/25 - 50mm Ball Anvil & Flat Spindle	218.00	160.00
54-860-211-0	0 - 1"/0 - 25mm Ball Anvil & Ball Spindle	204.39	150.00
54-860-212-0	1 - 2"/25 - 50mm Ball Anvil & Ball Spindle	218.00	160.00











# Rapid-Mic Quick-Displacement Electronic Micrometers



SOURCE MINISTRATE SOURCE SOURC

NOW available with ISO Cert. w I have been in the machining business for over 30 years this is by far the best mic I have ever had. One little thing or should I rephrase that, one huge thing, this mic comes with a lifetime warranty... no other company can provide that!

John T.

## **NEW Bluetooth Ranges NOW Available!**

- · Position recall
- · Delrin quick displacement thimble
- · Adjustable measuring force, 5N/10N (54-815-030-0 only)
- · Menu customizable with free software
- Non-rotating spindle, 10mm/spindle rotation
- · USB output or bluetooth available













54-815-111-0

Order No.	Description	Max Error	LIST Price	Sale Price
54-815-030-0	0 - 1.18"/0 - 30mm 0.00012"/0.003mm		\$535.59	\$435.00
54-815-030-C	1.18"/30mm with ISO/A2LA Cer		460.00	
54-815-060-0	1.18" - 2.6"/30 - 66mm	0.00016"/0.004mm	792.51	710.00
54-815-100-0	2.6" - 4.0"/66 - 102mm	0.00020"/0.005mm	1108.33	960.00
Set				
54-815-111-0	0 - 4"/0 - 102mm		\$2416.85	\$1995.00
Bluetooth Model				
54-815-130-0	0 - 1.18"/0 - 30mm	0.00012"/0.003mm	\$792.51	\$669.00
54-815-160-0	1.18" - 2.6"/30 - 66mm	0.00016"/0.004mm	1048.72	955.00
54-815-110-0	2.6" - 4.0"/66 - 102mm	0.00020"/0.005mm	1365.00	1199.00
Bluetooth Set				
54-815-112-0	0 - 4"/0 - 102mm		\$2997.39	\$2499.00
Connectivity Cables	s/Accessory			
54-115-526-0	Proximity cable with USB connect	ction	\$141.57	\$125.00
54-115-527-0	Proximity cable with serial conne	ction	141.57	125.00
54-115-246-BT	USB Bluetooth receiver		50.24	45.00









#### **Great for Shop Environments!**

- Corrosive resistant ratchet thimble (anodized aluminum)
- · Super large LCD display, 14mm height
- Resolution: 0.00005"/0.001mm
- · IP54 protected against fluid and dust
- · Spindle lock
- · Carbide tipped anvil and spindle
- · SPC output
- · Includes fitted case





Order No.	Range	Accuracy	List Price	Sale Price
54-880-001-0	NEW 0 - 1"/0 - 25mm	0.00016"/0.004mm	\$138.00	\$124.00
54-880-002-0	NEW 1 - 2"/25 - 50mm	0.00016"/0.004mm	159.00	142.00
54-880-003-0	NEW 2 - 3"/50 - 75mm	0.0002"/0.005mm	170.00	152.00
54-880-004-0	NEW 3 - 4"/75 - 100mm	0.0002"/0.005mm	195.00	174.00
Set				
54-880-103-0	NEW 0 - 3"/0 - 75mm		\$439.00	\$390.00
Accessory				
54-520-399-0	SPC cable		\$170.22	\$120.00
	SPC cable		\$170.22	\$120.00

# Indicating Micrometers



- · Anvil and spindle hardened and precision ground
- · Fully insulated frame, satin chrome finish
- · Carbide tipped anvil & spindle
- · Retracting button conveniently located in relation to operator's hand
- · 0 1" Range, head graduated in 0.001"

- · Dial graduated in 0.00005"
  - · Diameter of spindle: 0.256"
  - · Includes case

Order No.	Range	Accuracy	List Price	Sale Price
52-245-501-0	0 - 1"	0.00016"	\$356.45	\$265.00
52-245-502-0	1 - 2"	0.00016"	413.40	310.00















- Accuracy: ± 0.00016"/0.004mm (up to 2")
- · Carbide measuring faces
- · Absolute and incremental modes
- · Ratchet thimble







Order No.	Range	List Price	Sale Price
54-870-001-0	0 - 1"/0 - 25mm	\$99.18	\$72.00
54-870-002-0	1 - 2"/25 - 50mm	107.10	79.00
54-870-003-0	2 - 3"/50 - 75mm	121.38	88.00
54-870-004-0	3 - 4"/75 - 100mm	135.66	99.00
Set			
54-870-103-0	0 - 3"/0 - 75mm Set	\$292.27	\$210.00

### **Electronic Coolant Resistant Micrometers**







- · Protected to IP54 specifications
- · Automatic switch off
- Accuracy: ± 0.00016"/0.004mm (up to 2")
- Resolution: 0.00005"/0.001mm
- · Carbide measuring faces
- Absolute & incremental modes

Order No.	Range	List Price	Sale Price
54-860-001-1	0 - 1"/0 - 25mm	\$125.67	\$95.00
54-860-002-1	1 - 2"/25 - 50mm	145.50	109.00
54-860-003-1	2 - 3"/50 - 75mm	158.69	119.00
54-860-004-1	3 - 4"/75 - 100mm	184.17	137.00
54-860-005-1	4 - 5"100 - 125mm	206.28	154.00
54-860-006-1	5 - 6"/125 - 150mm	231.51	170.00
Set			
54-860-103-1	0 - 3"/0 - 75mm Set	\$413.37	\$305.00

The Fowler-Bowers range of mechanical two and three point bore micrometers are now available as XT extended travel holemikes, allowing a wide measurement range without the need to interchange anvils.

52-255-316-0



- · 3-pt contact with tungsten carbide
- measuring anvils above 0.5"
- · Blind bore measuring heads featured above 0.5"
- Ratchet stop for consistent measuring
- · Extensions available for deep measuring
- Includes UKAS certificates for all Holemikes and setting rings

				Meas.	Ring	List	Sale
Order No.	Range	Grads.	Accuracy	Depth	Included	Price	Price
52-255-310-0	0.250" - 0.312"	0.00025"	0.00015"	2.28"	0.312"	\$737.86	\$565.00
52-255-311-0	0.312" - 0.375"	0.00025"	0.00015"	2.28"	0.312"	683.21	525.00
52-255-312-0	0.375" - 0.500"	0.00025"	0.00015"	2.28"	0.5"	683.21	525.00
52-255-313-0	0.500" - 0.625"	0.00025"	0.00015"	2.44"	0.5"	683.21	525.00
52-255-314-0	0.625" - 0.750"	0.00025"	0.00015"	2.44"	0.75"	700.61	535.00
52-255-315-0	0.750" - 1"	0.00025"	0.00015"	2.60"	0.75"	769.48	590.00
52-255-316-0	1" - 1.375"	0.00025"	0.00015"	2.60"	1.375"	1096.34	840.00
52-255-317-0	1.375" - 2"	0.00025"	0.00015"	3.15"	1.375"	1122.55	860.00
52-255-318-0	2" - 2.625"	0.00025"	0.0002"	3.15"	2.625"	1339.04	1030.00
52-255-319-0	2.625" - 3.250"	0.00025"	0.0002"	3.15"	2.625"	1351.02	1040.00
52-255-320-0	3.250" - 4"	0.00025"	0.0002"	3.94"	3.25"	1685.52	1295.00

#### Fowler-Bowers XT-Series Holemike Sets

Order No.	Range	Includes	List Price	Sale Price	
52-255-565-0	0.250" - 0.375"	2 heads, 2 handles, 1 ring	\$1638.31	\$1260.00	
52-255-665-0	0.375" - 0.750"	3 heads, 3 handles, 2 rings	1865.31	1430.00	
52-255-775-0	0.750" - 2"	3 heads, 3 handles, 2 rings	2931.59	2250.00	
52-255-885-0	2" - 4"	3 heads, 3 handles, 2 rings	3974.33	3210.00	

## **Electronic Indicating Micrometers**

A superior tool in quality and design, the Fowler-Bowers Electronic Indicating Micrometer operates quickly and easily.

- · Retractable anvil travel: 0.275"/7mm
- · Non-rotating spindle
- Switchable resolution 0.0005"/0.00005" (0.01/0.001mm)
- Repeatability: 0.00005"(1µm)
- · Measuring force 4.5 6N
- · Carbide tipped measuring faces
- · Adjustable table for part · Two reference memories
- · Preset Recall function
- · Hold/freeze display function · Direct inch/metric conversion
- Tolerance indication
- · Min/Max/TIR function
- · Bidirectional RS232 output
- · Includes case



Order No.	Description	List Price	Sale Price
54-245-777-0	0 - 1.25"/0 - 30mm	\$1232.35	\$1050.00
54-245-780-0	1.25" - 2.50"/30 - 60mm	1492.06	1200.00
Connectivity Cable			
54-115-336-0	Duplex opto cable	\$175.95	\$140.00

OL-A-THON° Vol. 19.















makes an awesome product!"

T.T.

54-567-050-BT














- Resolution: 0.00005"/0.001mm
- · IP67 rated
- To reduce hand fatigue, the travel of the Holematic trigger is adjustable for minimum over travel
- Tungsten carbide measuring faces on all 3-point heads from 0.5" (12.5mm) and up
- · Sizes over 0.500" (12.5mm) feature blind bore capability
- · Includes UKAS certificates for all pistol grip, heads and rings

Contact the Fowler Technical Department for special measuring applications

1	Order No.	Range	Includes	List Price	Sale Price
ĺ	54-567-009-BT	0.080" - 0.250"/2 - 6mm (2-point heads)	5 heads, 1 handle, 3 rings	\$6260.07	\$5090.00
	54-567-010-BT	0.250" - 0.375"/6- 10mm	2 heads, 1 handle, 1 ring	2454.58	1995.00
	54-567-020-BT	0.375" - 0.750"/10 - 20mm	3 heads, 1 handle, 2 rings	2871.63	2335.00
	54-567-050-BT	0.750" - 2" /20 - 50mm	3 heads, 1 handle, 2 rings	3707.86	3015.00
	54-567-100-BT	2 - 4"/50 - 100mm	3 heads, 1 handle, 2 rings	4127.04	3355.00
	54-567-105-BT	4 - 6"/100 - 150mm	2 heads, 1 handle, 1 ring	3707.86	3015.00
	54-567-110-BT	6 - 8" /150 - 200mm	2 heads, 1 handle, 1 ring	4894.29	3980.00
	54-567-200-BT	4 - 8" /100 - 200mm	4 heads, 1 handle, 2 rings	7746.82	6300.00
	54-567-210-BT	0.750" - 4" /20 - 100mm	6 heads, 1 handle, 4 rings	6034.02	4900.00
	54-567-620-BT	0.250" - 0.750" 76 - 20mm	5 heads, 1 handle, 3 rings	3422.40	2780.00
	Connectivity Ca	bles/Accessory			
	54-115-526-0	Proximity cable with USB connection		\$141.57	\$125.00
	54-115-527-0	Proximity cable with serial connection		141.57	125.00
	54-115-246-BT	USB bluetooth receiver		50.24	45.00







- · USB connectivity and Bluetooth
- Resolution: 0.00005"/0.001mm
- · IP67 rated
- · Ratchet stop for consistent measurement
- · Sizes over 1"/25mm offer extended travel
- · Includes UKAS certificates for micrometer, heads and settings rings

#### Contact the Fowler Technical Department for special measuring applications

Order No.	Range	Includes	List Price	Sale Price
54-367-000-BT	0.080" - 0.250"/2 - 6mm (2-point heads)	5 heads, 1 handle, 3 rings	\$5705.05	\$4640.00
54-367-010-BT	0.250" - 0.375"/6- 10mm	2 heads, 1 handle, 1 ring	2377.11	1930.00
54-367-020-BT	0.375" - 0.750"/10 - 20mm	3 heads, 1 handle, 2 rings	2836.61	2300.00
54-367-050-BT	0.750" - 2" /20 - 50mm	3 heads, 1 handle, 2 rings	3852.18	3130.00
54-367-100-BT	2 - 4"/50 - 100mm	3 heads, 1 handle, 2 rings	4265.00	3465.00
54-367-105-BT	4 - 6"/100 - 150mm	2 heads, 1 handle, 1 ring	3600.68	2925.00
54-367-110-BT	6 - 8" /150 - 200mm	2 heads, 1 handle, 1 ring	4756.33	3865.00
54-367-200-BT	4 - 8" /100 - 200mm	4 heads, 1 handle, 2 rings	7515.47	6110.00
Connectivity Ca	ables/Accessory			
54-115-526-0	Proximity cable with USB connection		\$141.57	\$125.00
54-115-527-0	Proximity cable with serial connection		141.57	125.00
54-115-246-BT	USB bluetooth receiver		50.24	45.00





















We are so confident that these Fowler-Sylvac Mark VI electronic indicators are the most accurate, most dependable, best made products you can buy, we are extending the warranty to last a lifetime!

Quality, accuracy, dependability, world-class customer service and now a real Lifetime Warranty!

No Gimmicks No Hurdles No Nonsense

Mark VI

**FowlerVid** 



**Mark VI Electronic Indicators** 

- Robust construction
- · Repeatability: 2µm
- · Output: Proximity/Power -USB/RS232/digimatic/Wireless
- · Menus customizable with free software
- · Wide range of functions (MIN/MAX/DELTA, TOL, Factor, Preset. Auto Off, etc)
- · Bezel rotates 270°
- Large display with LED tolerance indicators
- · Includes lug back















Order No.	Description	Maximum Error	Resolution	List Price	Sale Price
54-530-125-0	0 - 0.500"/12.5mm	0.0004"/0.01mm	0.0005"/0.01mm	\$448.16	\$395.00
54-530-135-0	0 - 0.500"/12.5mm	0.00012"/0.003mm	0.00005"/0.001mm	573.85	499.00
54-530-145-0	0 - 1"/25mm	0.0004"/0.01mm	0.0005"/0.01mm	511.50	450.00
54-530-155-0	0 - 1"/25mm	0.00016"/0.004mm	0.00005"/0.001mm	612.11	540.00
54-530-155-C	0 - 1"/25mm with ISC	D/A2LA Certification			565.00
54-530-175-0	0 - 2"/50mm	0.00019"/0.005mm	0.00005"/0.001mm	\$1158.63	1015.00
Bluetooth					
54-530-335-0	0 - 0.500"/12.5mm	0.00012"/0.003mm	0.00005"/0.001mm	\$710.48	\$620.00
54-530-355-0	0 - 1"/25mm	0.00016"/0.004mm	0.00005"/0.001mm	759.72	665.00
Accessory					
54-115-246-BT	USB Bluetooth Recei	iver		\$50.24	\$45.00
Analog Display					
54-530-535-0	0 - 0.500"/12.5mm	0.00012"/0.003mm	0.00005"/0.001mm	\$644.90	\$565.00
54-530-555-0	0 - 1.00"/25mm	0.00016"/0.004mm	0.00005"/0.001mm	705.06	615.00

## **Mark VI Nano Electronic Indicators**

- · Accuracy: 0.00007"/0.0018mm 0.5" model 0.00008"/0.0022mm - 1" model
- · 0.00001"/0.0001mm resolution
- · 0.00002"/0.0005mm repeatability
- · Large display
- IP54 rated
- · Bluetooth available













54-530-625-0

Order No.	Description	Accuracy	Resolution	List Price	Sale Price
Without Blueto	ooth				
54-530-625-0	0.5"/12.5mm	0.00007"/0.0018mm	0.00001"/0.0001mm	\$1082.02	\$950.00
54-530-630-0	1"/25mm	0.00008"/0.0022mm	0.00001"/0.0001mm	1174.61	1030.00
Bluetooth					
54-530-635-0	0.5"/12.5mm	0.00007"/0.0018mm	0.00001"/0.0001mm	\$1289.78	\$1130.00
54-530-640-0	1"/25mm	0.00008"/0.0022mm	0.00001"/0.0001mm	1310.90	1150.00

## **S Dial Pro High Accuracy Indicators**

- Range: 2"/50mm
- · 0.00001"/0.0002mm repeatability
- · Mixed ceramic bearing/ball bearing system
- · Includes spindle lifting attachment
- IP54 rated
- · Available with or without spring tension
- · 8mm or 25mm mounting diameter













-530		

Order No.	Description	List Price	Sale Price
54-530-700-0	8mm mount with spring	\$2759.98	\$2200.00
54-530-705-0	25mm mount with spring	2759.98	2200.00
54-530-710-0	8mm mount without spring	2759.98	2200.00
54-530-715-0	25mm mount without spring	2759.98	2200.00

54-530-700-0















Mr. R.

#### INCH • METRIC • FRACTION

- · 2-1/4" dial face
- · Lugback and 3/8" stem mountings
- Resolution 0.0005"/0.01mm
- Tolerance function
- · Absolute/incremental reading
- · Floating zero

#### Carbide-tipped point!

Order No.	Description	List Price	Sale Price
54-520-255-0	0.50"/12.5mm Indi-X Blue	\$103.08	\$70.00
54-520-250-0	1"/25mm Indi-X Blue	110.99	75.00
54-520-260-0	1"/25mm/64ths Indi-X Blue Inch-Metric-Fraction	112.61	80.00

54-520-250-0

## **Granite Dial Gage Stand**

54-520-260-0

- · Sturdy and compact with extreme stability
- 6" x 6" x 2" granite base
- · Positive lock screw
- · Fine adjustment knob for zero setting
- · Column height is 8"
- Accepts all lug-back indicators
- · This stand is maintenance free
- Flatness: 0.00005"



Indicator not included with stand

Order No. 52-580-030-0

Sale \$90.00

List \$123.69

### **Small Face Electronic Indicator**

- Range: 0 0.50"/0 12.5mm
- Accuracy: ± 0.0008"/0.02mm
- Resolution: 0.0005"/0.01mm
- 1.76" dial face
- · Carbide tip
- · Contains flat and center lug backs
- Includes NIST certification and fitted case

Order No. 54-520-275-0

Sale \$95.

List \$114.44

# INDI-X hlue



- · Range: 1"/25mm
- Accuracy: ± 0.0002"/0.005mm
- Resolution: 0.00005"/0.001mm
- IP65 protected
- · Carbide tip
- Tolerance function
- · Contains flat and center lug backs
- · Includes NIST certification and fitted case

Order No. 54-520-270-0

Sale \$125.00

List \$151.90

# INDI-X hlue

#### **IP65 Electronic Indicator**

- · Range: 1"/25mm
- Accuracy: ± 0.0012"/0.03mm
- · IP65 protected
- · Carbide tip
- Tolerance function
- · Contains flat and center backs
- · Includes NIST certification and fitted case



Order No. 54-520-265-0

Sale \$110.00

List \$126.93

















OI -A-THON° Vol. 19.
















#### Includes NIST Certificate of Calibration

Order No.	Range	Graduation	Reading	Balanced Reading	Dial Color	List Price	Sale Price
52-520-110-1	1"	0.001"	0 - 100	_	Black Face	\$92.91	\$65.00
52-520-110-2	1"	0.001"	0 - 100	<u> </u>	White Face	92.91	65.00
52-520-105-0	0.500"	0.001"	0 - 100	0 - 50 -0	White Face	87.88	60.00
52-520-129-0	1"	0.0005"	0 - 50	0 - 25 - 0	White Face	112.36	75.00
52-520-135-0	0.05"	0.0001"	0 - 10	0 - 5 - 0	White Face	161.01	110.00
52-520-125-0	0.250"	0.0005"	0 - 50	0 - 25 - 0	White Face	122.64	82.00

# **X-PROOF**® IP54 Shockproof Dial Indicators

#### Protection Includes:

- · Rubber bellows on stem
- · O-ring seal on safety cap
- O-ring protection for bezel and rotating dial
- Sealed back plate

#### Specifications:

- Shockproof design
- · Continuous reading: 0-100
- Tolerance markers
- AGD Group 2, 2-1/4" dia.
- · Lugback and carbide point



Order No.	Range	Graduation	Reading	Contact Point	List Price	Sale Price
52-520-450-0	1"	0.001"	0 - 100	4 - 48 (3/8" stem)	\$78.15	\$65.00
52-520-455-0	1"	0.001"	0 - 100	4 - 48 (3/8" stem)	84.49	65.00

IMPORTANT: Due to recent tariff increases, prices maybe subject to change.

Prices & Specifications are subject to change without notice.

32

# XTEST

### **Horizontal Indicators**

- Solid copper body
- Super smooth jeweled movement
- Smoother bezel adjustment for easier zero setting
- 0.080" and 0.120" carbide ball contact points (0.040"
- · 0.060" range with auto reverse and rev. counter
- · Easy to read tilted dial

 5/32" pivotable stem Includes NIST

Gertificate of Calibration



1	Order No.	Style	Graduations	Dial Diameter	Dial Reading	List Price	Sale Price
	52-562-001-0	Horizontal	0.0005"	1-1/2"	0-15-0	\$132.36	\$99.00
	52-562-002-0	Horizontal	0.0005"	1"	0-15-0	132.36	99.00
	52-562-003-0	Horizontal	0.001"	1"	0-15-0	132.36	99.00
	52-562-008-0	Horizontal	0.01mm	38mm	0-40-0	132.59	99.00

# XTEST Vertical Indicators



52-562-005-0

#### TWICE the range of most indicators!

- · Graduations: 0.0005"
- · Dial diameter: 1" and dial reading: 0 15- 0
- · Solid copper body and super smooth jeweled movement
- · Smoother bezel adjustment for easier zero setting
- 0.080" and 0.120" carbide ball contact points (0.040" steel ball)
- · 0.060" range with auto reverse and rev. counter
- 5/32" pivotable stem





1	Order No.	Style	Graduations	Dial Diameter	Dial Reading	List Price	Sale Price
	52-562-004-0	Vertical	0.0005"	1-1/2"	0-15-0	\$144.94	\$99.00
	52-562-005-0	Vertical	0.0005"	1"	0-15-0	144.94	99.00
	52-562-006-0	Vertical	0.001"	1"	0-15-0	144.94	99.00

## Each Combo Kit Includes:

- · X-Test Dial Test Indicator
- Axial support
- · Height gage bar with clamp
- Adaptor sleeve: 5/32" to 3/8"
- · Contact point case
- · Contact point wrench
- · Complete in shop hardened case





Order No.	Description	Graduations	List Price	Sale Price
52-562-100-0	52-562-001-0 w/accessories	0.0005"	\$194.34	\$140.00
52-562-110-0	52-562-002-0 w/accessories	0.0005"	176.10	130.00
52-562-120-0	52-562-003-0 w/accessories	0.001"	194.34	140.00

.040" & .120











#### Test Indicator Set with Certificate of Calibration

#### Test Indicator:

- · Auto-reverse
- Jeweled movement
- Range: 0.030"
- Graduation: 0.0005"
- · Dial Reading: 0-15-0
- Dial Diameter: 1.125"
- · Point length: 0.400"
- Carbide contact points

#### Set Also Includes:

- 0.080" & 0.040" contact points
- · Universal clamp
- · Height gage attachment
- · 3/8" & 1/4" dovetail clamps
- · Manufacturer's test certificate
- Meets ANSI Specs for accuracy
- · All in a fitted molded case



Order No. 52-562-999-0

Sale \$125.00 Line

List \$145.12

#### **Test Indicators**

All Fowler Test Indicators include bi-directional constant clockwise rotation, automatic reversal, three dovetail mountings, jeweled movement, two dovetail clamps and a molded case.



Order	Face	Total	Dial		Dial	Point	List	Sale
No.	Color	Range	Reading	Graduation	Diameter	Length	Price	Price
52-562-774-0	white	0.030"	0-15-0	0.001"	1"	1/2"	\$124.42	\$80.00
52-562-776-0	white	0.030"	0-15-0	0.0005"	1-1/2"	1/2"	138.28	80.00
52-562-780-0	black	0.030"	0-15-0	0.0005"	1-1/2"	1/2"	138.28	80.00





52-562-782-0

Order No.	Face Color	Total Range	Dial Reading	Graduation	Dial Diameter	Point Length	List Price	Sale Price	
52-562-782-0	black	0.020"	0-10-0	0.0005"	1"	1-7/16"	\$136.22	\$85.00	
52-562-783-0	white	0.020"	0-10-0	0.0005"	1-1/2"	1-7/16"	136.22	85.00	



- All accept 3/8" indicators
- · Mag base and HOLD-TEC with fine adjust also accepts 8mm indicators
- · All have dovetail clamps for test indicators
- · Mag base features 2 fine adjusts making it a 6-Axis Mag Base
- · HOLD-TEC can be mounted in drill chucks, collets, dial gage stands with 8mm mount diameter to make a quick transfer stand
- · Mag base has 180 lb. pull
- · Adjust to any position
- · Powerful On/Off mag base
- · Central locking system





Order No.	Description	List Price	Sale Price
52-585-085-0	HOLD-Tec Mag Base with Double Fine Adjust	\$165.82	\$95.00
52-565-036-0	HOLD-Tec without Fine Adjust	93.14	62.00
52-565-038-0	HOLD-Tec with Fine Adjust	101.22	65.00

52-565-038-0

## **Flex Arm Magnetic Base**

52-565-036-0

- · All purpose magnetic base with 180 lbs. of pulling power
- · Base can be mounted vertically as well as horizontally
- · V-bottom base allows mounting on cylindrical surfaces
- · Adjusts to virtually any position

Order No. 52-585-015-0

Sale \$55.

List \$81.99

## **Magnetic Base**

- 9.5" Height and 85 lb. pull
- Base dimensions are 2" x 2-11/32" x 1-13/16"(50mm x 58.7mm x 46mm)
- · Accepts all AGD dial indicators
- · V-bottom base allows mounting on cylindrical surfaces
- · Mounts test indicators with 1/4" post mount

Order No. 52-585-005-0

Sale \$36













IMPORTANT: Due to recent tariff increases, prices maybe subject to change. Prices & Specifications are subject to change without notice.



- · Clear microfine graduations on satin chrome finish
- · Base constructed of hardened tool steel is precision ground and microlapped. All other surfaces are satin chrome finished.
- · Quick and easy zero adjustment
- · Rods hardened, ground and lapped on measuring surfaces and adjustable in either direction
- Interchangeable rods are fitted to the micrometer spindle against a positive stop and locked
- · Ratchet thimble
- · Threads hardened, ground and lapped for accuracy
- · Price includes spanner wrench and fitted case



7	Order No.	Range	Graduation	Accuracy	Base Size	List Price	Sale Price
	52-225-005-1	0 - 3"	0.001"	0.0002"	2.5"	\$164.50	\$129.00
	52-225-006-1	0 - 4"	0.001"	0.0002"	2.5"	197.42	153.00
	52-225-011-1	0 - 4"	0.001"	0.0002"	4"	197.42	153.00
	52-225-020-1	0 - 6"	0.001"	0.0002"	2.5"	216.68	165.00
	52-225-035-1	0 - 12"	0.001"	0.00028"	4"	350.98	270.00

**Economy Depth Micrometers** 


- · Satin chrome finish
- · Base surface hardened and ground
- · Ratchet thimble
- · Locking clamp
- · Rod diameter: 0.176"
- · Includes case



<b>52-225-110-0</b> 0 - 0"	0.001"	0.000011			
	0.001	0.0002"	2.5"	\$137.87	\$115.00
<b>52-225-112-0</b> 0 - 6"	0.001"	0.0002"	2.5"	162.82	135.00
<b>52-225-114-0</b> 0 - 4"	0.001"	0.0002"	4"	148.93	125.00

## **Digit Counter Depth Micrometers**

- · Easy-to-read digit counter
- · Microfine 0.001" graduations
- · 4" base constructed of tool steel, hardened and ground
- · Satin chrome finish
- · Ratchet thimble
- Locking clamp
- · Rod diameter: .176"
- · Includes wrench and fitted case



Order No.	Range	Graduation	Base	List Price	Sale Price
52-225-176-0	0 - 6"	0.001"	2.5"	\$197.64	\$155.00
52-225-226-0	0 - 6"	0.001"	4"	204.39	160.00

with IP54 protection!

BEST VALUE!

Shockproof Indicator





- · 0-1" AGD Group 2 IP54 Indicator
- · Sealed bezel, top cap and dial with bellows on stem
  - · Sealed back plate
  - ± 0.001" accuracy
  - · 0.001" graduations
  - · 4" base ground and lapped for flatness
  - · Rods connect for 22" capacity
  - · Includes 2 extra points (spline & needle)
  - Tolerance markers



Order No. 52-125-007-0

List \$218.56

# **Depth Base Attachments**

- · Turn your dial or electronic indicator into a depth gage (may reduce range)
- · 4" length
- Fits indicators with 3/8" and 8mm mounting stems
- · Ground and lapped base
- · Each supplied with 4 extension points, for added application range (4 - 48 thread)
- · 52-125-005-0 has 0.430" radius





52-125-004-0

7	Order No.	Description	List Price	Sale Price
П	52-125-004-0	Flat depth base attachment	\$40.88	\$30.00
	52-125-005-0	Radius style depth base attachment	40.88	30.00

## Indicator Extensions





- · Made of stainless steel
- 7 popular sizes
- · Stackable for extended lengths
- · Available with either inch or metric threads
- Use to extend the contact point of dial indicators

Order No.	Description	List Price	Sale Price
Inch			
52-526-001-0	1", 4 - 48 thread	\$5.02	\$4.00
52-526-002-0	1-1/2", 4 - 48 thread	5.02	4.00
52-526-003-0	2", 4 - 48 thread	6.35	5.00
52-526-004-0	2-1/2", 4 - 48 thread	6.35	5.00
52-526-005-0	3", 4 - 48 thread	6.35	5.00
52-526-006-0	4", 4 - 48 thread	8.81	7.00
52-526-007-0	6", 4 - 48 thread	10.15	8.00
Metric			
52-526-011-0	1", M2.5 thread	\$6.24	\$5.00
52-526-012-0	1-1/2", M2.5 thread	7.28	6.00
52-526-013-0	2", M2.5 thread	7.28	6.50
52-526-014-0	2-1/2", M2.5 thread	7.28	6.50
52-526-015-0	3", M2.5 thread	7.28	6.50
52-526-016-0	4", M2.5 thread	8.32	7.50
52-526-017-0	6", M2.5 thread	10.40	9.00













### **Indicator Chucks**

Find us on social media! 灵圖
















- · 0.140" 0.040" chucking capacity
- · Can be used with small pin gages for special or restricted applications
- Available in both 4 48 and M2.5 threads





Order No.	Description	List Price	Sale Price
52-526-020-0	Indicator Chuck with 4 - 48 thread	\$23.93	\$20.00
52-526-021-0	Indicator Chuck with M2.5 thread	23.93	20.00

52-526-020-0

### **Indicator Contact Point Set**



- · 22 piece set
- 4-48 thread
- · Works with AGD style indicators
- · Supplied in fitted case

Order No. 52-525-222-0

Sale \$20.00

List \$39.03

# **Ruby Contact Point Set**

- · 6 piece set
- · 2 flat contacts
- · 2 convex contacts
- · 1 extra long contact
- 1 ruby ball contact
- · Includes threaded base



Order No. 52-525-065-1

Sale \$16.00

List \$34.10

TOOL-A-THON® Vol. 19.1

IMPORTANT: Due to recent tariff increases, prices maybe subject to change. Prices & Specifications are subject to change without notice.

# **Inside Micrometers**



- Measuring faces are fully hardened, precision ground and microlap finished to assure exceptionally accurate measuring
- · Spindle threads are hardened and ground
- Microfine graduations 0.001" on a satin chrome finish permit easy reading
- Ratchet stop thimble assures exact and repetitive readings
- · Includes a setting ring

7	Order No.	Range	Graduation	Accuracy	List Price	Sale Price
	52-275-001-1	0.2" - 1.2"	0.001"	0.0002"	\$116.01	\$85.00
	52-275-005-0	0.2" - 2.2"	0.001"	0.0002"	196.12	155.00

## **Inside Micrometers**



- Each set consists of an inside micrometer head and a series of fully hardened and lapped extension rods of different lengths all with carbide measuring faces
- · Anvil and spindle are hardened and precision ground with microlap finish on ends
- · Microfine graduations on satin chrome
- · Positive locking nut on spindle
- It is recommended that the inside micrometer with a rod be calibrated by a micrometer or ring gage.
- Coiled spring pressure contact type rods are each marked with appropriate length.
- Quick, easy zero adjustment on the sleeve.
- Accuracy: 0.00005" x (3 + L"/2)
- Graduation: 0.001"
- · Includes a wrench, case and reference standard

Order No.	Range	List Price	Sale Price
52-243-026-1	2 - 6"	\$142.63	\$110.00
52-243-212-1	2 - 12"	176.14	135.00
52-243-220-1	2 - 20"	228.32	175.00
52-243-240-1	2 - 40"	603.90	480.00
52-243-480-1	4 - 80"	1273.16	1075.00
52-243-512-1	4 - 120"	2780.61	1960.00











## 1.4" to 6" Dial Bore Gage Sets

with Carbide Anvils

Industry's two most popular bore gage ranges combined in one set!

#### Carbide Anvils

- · Easy-to-read
- · Graduation: 0.0005" or 0.01mm
- Insulated grip
- · 1.4" to 6" range or 35 to 160mm

52-646-300-0







52-646-400-0



Order No.	Range	Graduation	List Price	Sale Price
52-646-300-0	2 - 6"	0.0005"	\$129.42	\$110.00
52-646-400-0	1.4 - 6"	0.0005"	196.75	140.00
52-646-500-0	1.4 - 6"	0.0001"	246.55	180.00
52-646-220-0	35 - 60mm	0.01mm	217.41	140.00
Extensions				
52-646-450-0	20" depth extension		\$84.89	\$75.00
52-646-475-0	40" depth extension		106.12	95.00

# XTENDER | Electronic Bore Gage Set

with Carbide Anvils

Industry's two most popular bore gage ranges combined in one easy-to-use electronic set!

Preset size of master for absolute reading and use minimum hold feature to lock on the bore size as the gage is rocked in the part to be measured.




#### Bore Gage features:

- Range: 1.4"-6"/35mm-150mm
- Carbide anvils
- Self-centering

#### Indicator features:

- Bar graph and numeric digital display
- · Preset with recall
- · ABS/INC measurement
- Min/Max/TIR









Order No.	Range	Resolution	List Price	Sale Price
54-646-401-0	1.4 - 6"/35 - 150mm	0.00005"/0.001mm	\$339.94	\$255.00
Extensions				
52-646-450-0	20" depth extension		\$84.89	\$75.00
52-646-475-0	40" depth extension		106.12	95.00



### **Bore Gage Set**

- · Fitted with a Sylvac Lifetime Warranty electronic indicator (54-530-535-0)
- · Range: 1.4 6"
- · Analog scale for reversal point detection
- IP54 rated indicator
- · Carbide tipped anvils
- Min/Max/TIR readings
- · Supplied in a fitted case









Oldel No.	Hange	Headiation	LISTITIO	Jaie File	
54-646-535-0	1.4 - 6"/35 - 150mm	0.00005"/0.001mm	\$800.70	\$710.00	
Extensions					
52-646-450-0	20" depth extension		\$84.89	\$75.00	
52-646-475-0	40" depth extension		106.12	95.00	
Connectivity Ca	bles				
54-115-526-0	Proximity cable with U	JSB connection	\$141.57	\$125.00	
54-115-527-0	Proximity cable with s	erial connection	141.57	125.00	

### **Bore Gage Setting Master Kits - Inch & Metric**

Fowler's Bore Gage Setting Master Kit is used for accurately setting any bore gage up to 6"/150mm in diameter to an accuracy of 0.0001"/0.003mm

#### Each Set includes:

Setting Device (53-646-000-1 - Inch Model)

- · Base anvil: 3.950" x 1.050"
- · Adjustable anvil 2.375" x .375" (two each)
- · Internal capacity: 6"/150mm
- · Depth capacity: 1"/25mm
- · Centralizer capacity width: 2.750"
- · Quick-release holder for fast adjustment
- · Can also be used for external setting, depending on application (external mics, snap gages, caliper gages)

#### Economy Gage Block Sets Inch model:

- 36 piece
- Tolerances to .00005"
- · Certificate of Calibration to NIST

#### Metric model:

- 33 piece
- · AS-2 grade
- · Certificate of Calibration to NIST



53-646-000-1

Includes:

Bore gage setting master

and gage block set. All in a custom-fitted

Order No.	Description	List Price	Sale Price
53-646-000-1	Inch Bore Gage Setting Master Kit	\$315.68	\$225.00
53-646-010-0	Metric Bore Gage Setting Master Kit	328.95	235.00
53-646-005-0	Bore Gage Setting Master Kit - without Gage Blocks	182.07	160.00












# XTRA-VALUE Bore Mics

**3-Point Bore Gage Micrometers** 









· Carbide tipped anvils

· Ratchet stop, satin chrome thimble

0.0001" graduations up to 0.50"
 0.0002" graduations above 0.50"

· Sizes below 0.50" includes 4" extension

Sizes above 0.50" includes 6" extension

· Each set includes setting ring and fitted aluminum case

Sizes below 0.50" read 0.060" from bottom of head
 Sizes above 0.50" read 0.020" from bottom of head







Order No.	Range	Accuracy	List Price	Sale Price
52-257-001-0	NEW 0.275" - 0.350"	0.00016"	\$327.73	\$290.00
52-257-002-0	NEW 0.350" - 0.425"	0.00016"	327.73	290.00
52-257-003-0	NEW 0.425" - 0.500"	0.00016"	327.73	290.00
52-257-004-0	NEW 0.500" - 0.650"	0.00016"	223.69	200.00
52-257-005-0	NEW 0.650" - 0.800"	0.00016"	223.69	200.00
52-257-006-0	NEW 0.800" - 1.000"	0.00016"	312.12	280.00
52-257-007-0	NEW 1" - 1.2"	0.00016"	312.12	280.00
52-257-008-0	NEW 1.2" - 1.6"	0.00016"	338.13	300.00
52-257-009-0	NEW 1.6" - 2"	0.0002"	390.15	350.00
52-257-010-0	NEW 2" - 2.5"	0.0002"	410.96	365.00
52-257-011-0	NEW 2.5" - 3"	0.0002"	442.17	395.00
52-257-012-0	NEW 3" - 3.5"	0.0002"	457.78	410.00
52-257-013-0	NEW 3.5" - 4"	0.0002"	483.79	435.00
Sets				
52-257-101-0	NEW 0.275" - 0.500"		\$889.54	\$800.00
52-257-102-0	NEW 0.500" - 0.800"		395.35	355.00
52-257-103-0	NEW 0.800" - 2"		1123.63	1010.00
52-257-104-0	NEW 2" - 4"		1477.37	1325.00

# Digi Level PLUS+

- NFW!
- Super large 18mm backlit display
- Bluetooth model available
- · Includes a 6" graduated, beveled straight edge PLUS, see page 44
- · Rechargeable battery
- · USB charging cable supplied
- · V's on top and bottom for measuring on cylindrical surfaces
- · Embedded magnets on bottom base
- IP65 rated
- Auto inverting display







54-422-550-0

54-422-450-1

1	Order No.	Description	List Price	Sale Price
	54-422-550-0	NEW Digi-Level PLUS	\$125.51	\$110.00
	54-422-550-BT	NEW Digi-Level PLUS with Bluetooth	141.88	125.00

# mini-MAG Protractor

The mini-MAG Protractor provides instant 360° digital inclination display of any angle with the additional unique feature of embedded magnets on both sides and the bottom which make it ideal for a variety of measurements.

- · Embedded magnets with 3.5lb. pull
- Uses standard 9V battery (250 hrs.)
- Measuring range: 360° (4 x 90°)
- · Display automatically inverts
- Resolution: 0.05°
- Accuracy: ± 0.2°
- Repeatability: 0.05°
- Dimensions 2.375" x 1.375" x 2.375"
- · Hold feature



Display inverts for easy reading!





# NFW!

#### 54-422-460-0


- · On/off, tilt %, light, zero functions
- · Display is backlit for low light areas

Order No.	Description	List Price	Sale Price
54-422-450-1	mini-MAG protractor	\$105.72	\$60.00
54-422-460-0	NEW mini-MAG II protractor	111.18	65.00

# ni-MAG PLUS

The Mini-Mag PLUS Protractor features a USB rechargeable battery, a backlit display, Tilt% function and IP54 protection against water, oil, and fluids.

- · 6 month battery life
- · Auto off after 5 minutes
- Embedded magnets
- Measuring range: 360° (4 x 90)
- · Display automatically inverts
- Resolution: 0.05°
- · Accuracy: ± 0.2°
- Repeatability: 0.05°
- - 2.12" x .9"







Order No. 54-422-500-0

Sale \$75.

List \$116.89



# Straight Edges PLUS+



52-480-070-0

Beveled edge with 1/64th graduations

· Satin chrome finish on scale

- · Hardened steel
- · 0.21" thick, 1.59" wide
- · Storage sleeve included

Order No.	Description	Straightness	List Price	Sale Price
52-480-065-0	NEW 6"	0.0015"	\$22.92	\$19.00
52-480-070-0	NEW 8"	0.0015"	28.38	24.00
52-480-075-0	NEW 12"	0.0015"	41.47	35.00
52-480-080-0	NEW 24"	0.0025"	63.30	53.00

# **Cylindrical Squares**

- · Used for checking squares, height gages and other instruments
- Hardened and the ends are lapped to 90° angular accuracy
- 6" cylindrical squares: ± 0.0001"
- 12" cylindrical square: ± 0.00015"
- · Includes handles and wood case



Order No.	Description	List Price	Sale Price
52-750-006-0	6" cylindrical square	\$200.91	\$165.00
52-750-012-0	12" cylindrical square	286.94	240.00

# **Steel Squares & Sets**

- · Made of the finest carbon tool steel, these economy squares have true right angles both inside and outside
- Beams and blades ground and lapped for straightness and parallelism
- · Hardened blade

CR HIGH.	i iai acrica biaac				
	<ul> <li>Beam grooved a</li> </ul>	at inner corner for cle	earance o	f burrs and	dirt
		lade edge to the wo		e: 2" & 3" = :	± 0.0006" ,
	4" & 6" = ± 0.00	08", 9" & 12" = ± 0.	0012"	Blade Size	Beam Size
				2"	1.5"
		Sets come		3"	2.5"
		complete in a  "Shop Hardened"		4"	3"
		molded case!		6"	4"
		molueu case:		9"	6"
52-432-246-0				12"	8"

Order No.	Size/Description	List Price	Sale Price
52-432-444-0	3 Piece Square Set: 2", 4" & 6" with shop hardened case	\$75.01	\$66.00
52-432-469-0	4 Piece Square Set: 4", 6", 9" & 12" with shop hardened case	176.03	155.00
52-432-004-0	4" Square only	23.50	20.00
52-432-006-0	6" Square only	26.12	23.00
52-432-009-0	9" Square only	60.13	51.00
52-432-012-0	12" Square only	113.12	96.00
52-432-012-0	12" Square only	113.12	96.00

# **Combination Square**

· Blades are chrome plated, fully hardened and tempered

- · Includes square, protractor and center head with 12" blade
- · Square head has level and scriber point
- · Double indexed protractor is graduated 180° in both directions
- · Graduated in 8ths, 16ths, 32nds and 64ths



Order No. 52-370-012-0

Sale \$165.

List \$212.85

### Rules

#### **EZ-Read Black Face Rules**

· Hardened stainless steel

· White easy-to-read microfine graduations against a black, non-glare finish

# 52-297-006-0

"Good instrument,

#### Satin Chrome Rules

- · Tempered steel
- · Non-glare
- · Sharp, easy-to-read microfine graduations



#### **GRADUATIONS**

4R: 8ths, 16ths, 32nds, 64ths 16R: 32nds, 64ths, 50ths, 100ths

#### **RIGID STEEL RULES**

Order No.	Finish	Size	Reading	List Price	Sale Price
52-330-006-0	Satin Chrome	6"	4R	\$14.46	\$12.50
52-337-006-0	Black	6"	4R	11.55	10.50
52-330-012-0	Satin Chrome	12"	4R	24.77	22.00
52-337-012-0	Black	12"	4R	22.27	19.00
52-350-006-0	Satin Chrome	6"	16R	12.17	10.50
52-338-006-0	Black	6"	16R	11.55	10.50
52-350-012-0	Satin Chrome	12"	16R	24.61	20.00
52-338-012-0	Black	12"	16R	19.67	15.50

#### **FLEXIBLE STEEL RULES**

Order No.	Finish	Size	Reading	List Price	Sale Price
52-295-006-0	Satin Chrome	6"	4R	\$11.99	\$10.50
52-297-006-0	Black	6"	4R	10.82	9.50
52-295-012-0	Satin Chrome	12"	4R	21.65	19.00
52-297-012-0	Black	12"	4R	17.48	15.50
52-308-006-0	Black	6"	16R	10.51	9.50
52-310-006-0	Satin Chrome	6"	16R	12.38	10.50
52-308-012-0	Black	12"	16R	17.48	15.50
52-310-012-0	Satin Chrome	12"	16R	21.95	20.00

# **Carbide Super Scriber**



· Lightweight · Retractable carbide tip · Knurled grip · Machined aluminum body · Pocket clip

Order No.	Description	Overall Length	List Price	Sale Price
52-500-050-0	Carbide Super Scriber	6.5"	\$35.66	\$28.50
52-500-055-0	Carbide Refill		10.92	9.50









# SHOP-BLOX®

# **Economy Rectangular Gage Block Sets**







- · Manufactured to meet Federal Specification ASME B89. 1.9 - 2002 tolerances on length for inch gage blocks
- Certificate of Calibration traceable to NIST
- Tolerances to ± 0.00005"
- · In high-quality fitted wood case

Order No.	Description	List Price	Sale Price
53-672-036-0	36 piece Economy Rectangular Gage Block Set	\$321.68	\$215.00
53-672-081-0	81 piece Economy Rectangular Gage Block Set	550.18	395.00

# QUICK CHECK Multi-Function Check Standard



- Accuracy of indicated values ± 0.003mm
- · One compact, multi-function, precise standard
- · Can be used to check and verify a multitude of measuring instruments
- · Check height gages, calipers, micrometers, depth gages, bore gages, test and dial indicators, caliper gages, protractors, and more ...
- Supplied with a manufacturer's test certificate and fitted wood case
- · All sizes marked are actual

Order No. 53-813-015-0

Sale \$1320.00

List \$1677.49

# **Telescoping Gage Sets**

Another great tool for easy and accurate measurements. Under spring tension, the plungers of the gage expand from the center to the size of the hole being measured and are then locked in place using the knurled knob. Final hole size is obtained by measuring over the contacts with a micrometer or vernier caliper.

- · Contact points are constructed of hardened tool steel, precision ground.
- · Double action rigid handle with self-centering feature for quick checking of inside measurements
- · Constant spring tension for uniform feel
- 52-470-006-0 covers a measuring range of 5/16" to 6" with measurable depths of 4" to 5"
- 52-470-007-0 covers a measuring range of 5/16" to 6" with measurable depths of 12"
- 52-470-000-0 Titanium Coated, 5/16" to 6" with measurable depths of 4" to 5"
- Includes fitted vinyl case



Order No.	Description	List Price	Sale Price
52-470-006-0	6" Telescoping Gage Set	\$110.20	\$75.00
52-470-007-0	12" Telescoping Gage Set	132.70	110.00
52-470-000-0	Titanium coated 6" Telescoping Gage Set	123.73	95.00

# **Screw Pitch Gages**

- Narrow designed blades permit use for internal and external screw threads
- Locking device at each end to secure all blades for storage or position
- Correct pitch is determined by matching blade teeth with threads
- · Precisely ground and finished
- · Blades marked with thread size

		500	9.0
0	METRISCH 60" HASE IN GESMAN	0	\$ 50 \$ 50 \$ 50 \$ 50
	52-485-015-0		

Z	Order No.	Description	List Price	Sale Price
	Inch Series			
	52-485-015-0	Screw Pitch Gage with 30 blades: 4 to 42 pitch standard V thread	\$12.04	\$10.00
	Metric Series			
	52-485-020-0	Screw Pitch Gage with 24 blades: 0.25mm to 6.0mm	12.04	10.00













52-439-234-0

- · 23 holes for easy clamping
- 52-439-001-0 features one hole only
- Sold in pairs
- · Hardened 56 60 HRC
- · Useful in layout & grinding work

Order No.	Description	Accuracy	List Price	Sale Price
52-439-001-0	1-2-3 Blocks	± 0.0002"/1"	\$145.59	\$99.00
52-439-234-0	2-3-4 Blocks	± 0.0001"/1"	96.90	85.00
52-439-246-0	2-4-6 Blocks	± 0.0003"/1"	224.62	130.00

X-βLOX<sup>®</sup> V-Block Set

#### 2 each @:

- Dimensions: 1-1/2" L x 1-1/4" W x 1-1/4" H
- · Work capacity: Approximately 1"

#### 2 each @:

- Dimensions: 2" L x 1-1/2" W x 1-1/2" H
- · Work capacity: 1-1/2"

#### All feature:

- · Surfaces are square and parallel within 0.0005"
- · V-grooves are square and parallel with all surfaces within 0.0005"
- Corresponding dimensions for each pair are alike within 0.0005"

"You will not go wrong buying this product "

J.B

Order No. 52-475-500-0

Sale \$120.00

List \$136.39

# **Parallel Sets**

- 1/2", 5/8", 3/4", 7/8", 1", 1-1/8", 1-1/4", 1-3/8", 1-1/2" & 1-5/8" heights
- · 6" in length
- · Height specifications relate to consistency within each pair. Absolute heights are
- · Hardness: 50 HRC, 6" length and 1/32" thickness
- · Includes fitted case





52-437-031-0

Order No.	Parallelism	Paired Height	List Price	Sale Price
52-437-031-0	± 0.0001"	± 0.0001"	\$251.50	\$190.00
52-437-000-0	± 0.0002"	± 0.001"	243.03	180.00

IMPORTANT: Due to recent tariff increases, prices maybe subject to change. Prices & Specifications are subject to change without notice.

48

# **Electronic Edge Finders**

- Six equally spaced light ports provide visibility at any angle
- · Made in the USA
- Edge finder lights instantly when stylus touches work edge
- · Repeatability: 0.0002"
- · Works on any conductive metal







Along with light indication, model #54-575-650-0 emits an audible "beep" at time of contact.

Order No.	Stylus	Shank	Audible	Battery	List Price	Sale Price
54-575-600-0	0.200"	1/2"	NO	12 volt	\$37.54	\$32.00
54-575-625-0	0.200"	1/2"	NO	12 volt	138.52	115.00
54-575-650-0	0.400"	3/4"	YES	12 volt	138.52	115.00

# **Transfer Punch Sets**

- Punches are made of hardened and tempered tool steel, black oxide finished
- All sizes are marked and diameters are slightly undersized for easy handling
- · Set supplied with index stand





2-028-0

Order No.	Description	Range	List Price	Sale Price
52-482-028-0	28 pc. Transfer Punch Set	3/32" to 1/2"	\$54.55	\$35.00
52-482-030-0	33 pc. Transfer Punch Set	1/2" to 1"	94.82	75.00

# **4 Piece Deburring Cutter Set**



- · Colored sleeves rotate to lock and unlock blades for easy changing
- Unique rounded head blades for safe deburring of drilled and machined holes, end milled areas, tubing, backside of holes and an almost unlimited amount of uses
- · Curved blades swivel freely to automatically follow shapes, contours and holes

Order No. 52-483-777-0














# **Electronic Inside/Outside Gage**

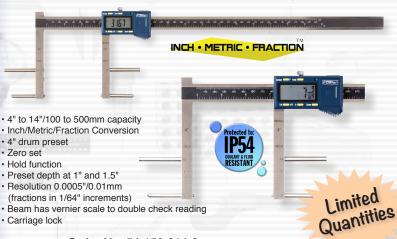

Order No. 54-150-014-0

List \$163.71

# **UltraTast Horizontal Test Indicators**



Made in GERMANY Order I 52-568

52-568-022-0

- Box-type housing opens on one side only
- · Bottom and side walls are one piece construction which encloses and protects the movement from shocks and damage
- · Self-contained movement
- · Jeweled movement bearings, precision gears and pinions for maximum sensitivity and ac-

Measuring Dial Stylus Measuring

99.00

- Satin-chrome finish is corrosion proof
- · Stylus: ball diameter 0.080"/2mm
- Swivel range 220° on all models
  Includes 1/4" & 5/16" Dovetail clamps

	Order No.	Reading	Range	Diameter	Length	Force
	52-568-010-0	0.0005"	± 0.015"	1.50"	0.453"	0.15N
	52-568-022-0	0.0005"	± 0.015"	1.083"	1.417"	0.07N
	1 6 7					
No. List Price			Sale I			
• <b>010-0</b> \$14						

206.86

IMPORTANT: Due to recent tariff increases, prices maybe subject to change. Prices & Specifications are subject to change without notice.

# Electronic IP54 Outside Micrometer Set

Dave's

Special Deals





- Range: 0 4"/0 100mm
- Large easy-to-read LCD display
- · Automatic switch off
- Friction thimble

Protected to IP54 specifications

· Insulated frames

limited quantities

· Supplied with standards, case and wrench

Order No. 54-860-104-0

Sale \$300.00

בייני לי בייני ביי

List \$679.22

Limited

### 12" Hook Rule

#### Front

. 0

Back



- · Made of tempered, hardened steel
- · Finished in non-glare satin chrome
- Rule Thickness: 0.040"
- · All hook rules are rigid

- · 4R graduations (8ths, 16ths, 32nds & 64ths)
- Sharp black graduations
- · Adjustable, removable hooks
- · Fitted in clear plastic case

Order No. 52-360-812-0

Sale \$15.00

List \$31.72













